

Website: www.naili.ltd Email: jim@naili.ltd


WhatsApp: +86 180 2894 1262

Gravity Roller Conveyor - Roller Diameter 50 mm - 1500 mm - Parameters


Parameter Name	Specification	Remarks			
General parameters					
Collapsed Length	525 mm				
Extended Length	1500 mm				
Load Capacity	50 kg/m				
Equipment parameters					
Overall Machine Length	Collapsed: 525 mm Extended: 1500 mm				
Load Capacity	50 kg/m	The heavier the goods, the greater the impact force			
Width	500/600/800 mm	Custom width available			
Roller	Diameter: 50 mm Thickness: ≥1.5 mm Material: Galvanized/201 Stainless Steel Standard Section Roller Count: 10 Expanding Section Roller Count: 9 Roller Gap: 110 mm				
Axle	Q235				
Extension Ratio	1:3				
Leg Frame (Main H- Frame)	Section Dimensions: 35*35 mm Thickness: ≥ 1.3 mm Material: 201 Stainless Steel				
Support Leg	Thickness: ≥ 1.3 mm Material: 201 Stainless Steel Process: Galvanized Surface Treatment	Height Adjustable			
Support Legs Length	450-680/550-820/750- 1200(default)/900-1500 mm	Custom length available			
Equipment Frame Steel	Thickness: ≥ 3.5mm Material: Q345				
Drive Mode	Physical gravity				
Equipment Material	Carbon steel/201 stainless steel				

Parameter Name	Specification	Remarks			
Warranty					
Frame Warranty	12 Months				

Product Dimensions					
Width	Total Body Width	Effective Width	Weight/Section		
500mm	655 mm	500 mm	26 kg		
600mm	755 mm	600 mm	30 kg		
800mm	955 mm	800 mm	39 kg		

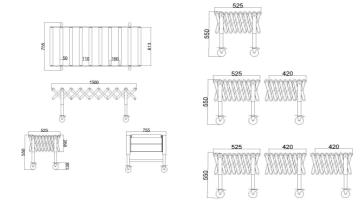





Our Warranty Policy:

Warranty Policy

One year warranty for the conveyor main body and motor. Six months warranty for the driven belt.

If the issue with the spare parts is not caused by human damage, we will provide replacement parts free of charge.

However, as this involves international shipping, we kindly ask the customer to cover the freight cost.

For any damage caused by human error within one year, or for issues that arise outside the warranty period, both the cost of the parts and the shipping will need to be covered by the customer.